

# CR™ 70 Aqua UCC

The CR70 Aqua under counter water cooler is a compact and powerful unit, that is able to supply all types of water dispense towers and taps with cold refreshing still and sparkling water. Connected directly to the mains water supply, it offers constant readiness to dispense for least operating costs.


## Key features include

- Ability to dispense chilled still water as well as chilled sparkling water
- Unit is equipped with electronic icebank controller
- Integrated circulation pump allows python cooling to the dispense tower
- Highly durable stainless steel housing offers long lifetime
- Completely seperated cooling coil for still water cooling ensures very small water pressure drops
- Electronic dry running protection for carbonator pump
- Very good suitable for high demand applications with peak dispense situations
- External good visible LED's show unit status and malfunctions such as CO<sub>2</sub> low level alarm, pump failure, etc.



All information contained in this document is the property of Cornelius and should not be passed to any third party without prior written consent.

© Cornelius

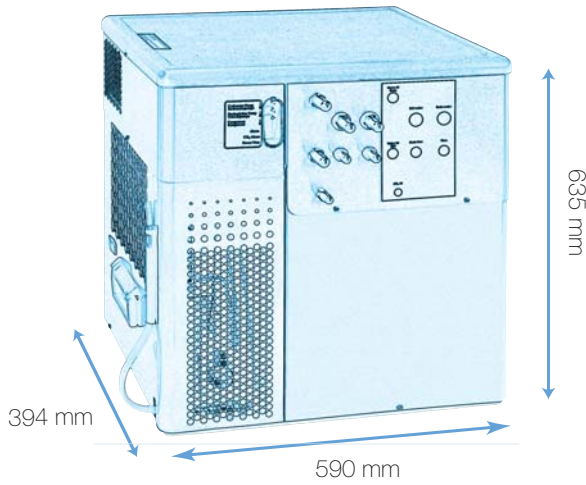

<b>Performance</b>	
in litre/ hour:	approx. 280 litre
Cooling capacity continuously dispensed per hour with a Delta T 6°C (14 to 8 °C):	85 litres
Cooling capacity peak	291* litres
*using icebank capacity over a period of 135 min	
Ice bank weight	7,5 kg
water bath size	27,5 litres
<b>Refrigeration:</b>	
Compressor size:	12 ccm/ 1/3 hp
Cooling Performance at 5°C evap. temp:	510 kcal
<b>Python pump:</b>	
Type:	Immersion pump
Max lift:	5 m
Connection size:	10 mm ID
<b>Control type:</b>	electronical Ice bank
<b>Cooling Coils</b>	
Material:	Stainless steel
Number of coils:	2
Length of coils 2 lines:	13 and 14 m
Diameter internal:	10 mm

<b>Maximum ambient temperature:</b>	32 °C
<b>Electrical:</b>	
Mains supply:	230 v / 50 hz
Power consumption:	880 watts
Supply:	2 m mains cable euro style plug
<b>Dimensions</b>	
Height	635 mm
Length	590 mm
Depth	394 mm
<b>Weight:</b>	
Equipment weight:	48 kg
Packed weight:	53 kg
<b>Variations and order numbers</b>	<b>CR70Aqua UCC</b>
CR70Aqua UCC	<b>22 1000 709</b>



Cooling performance and dispensing capacities at an ambient temperature of 24°C. Dispensed with a ΔT of 6°C (14° to 8°C).

Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact Cornelius prior to placing your order.

