

Linus™ 40

The Linus range from Cornelius is the classic unit among our overcounter coolers. A dry cooler in a timeless stainless steel design and fitted with our BT2000 beer tap. With its reliable cooling technology the Linus40 is quickly ready for use without long pre-cooling periods.

- Excellent workmanship for a high quality classic overcounter cooler
- Cost-effective cooling performance
- Instantly ready for use
- Inclusive drip tray
- Small dimensions, minimising use of precious counter space


Key features

- Classic design high-quality, modern look in stainless steel design
- Fountain dispensing made easy
- High performan along with low weight and small space requirement
- Ideal for home use too



All information contained in this document is the property of Cornelius and should not be passed to any third party without prior written consent.

© Cornelius

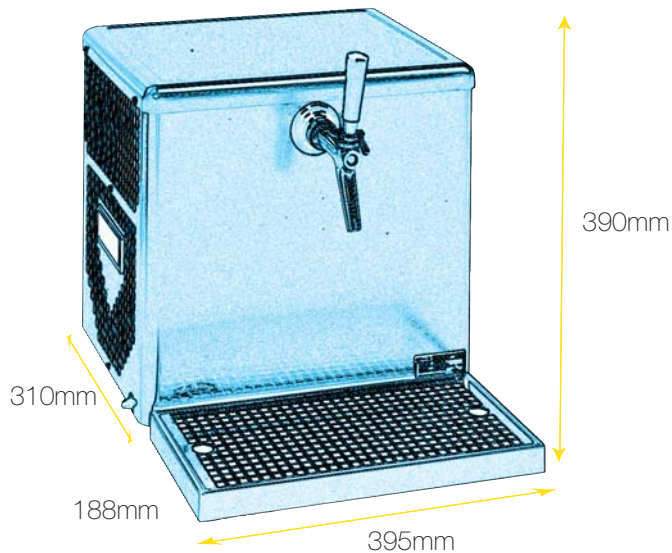

Performance:

Dispense capacity in l/hour continuously with a DeltaT of 10°C (18°C to 8°C): 43 litres

Maximum ambient temperature: 32°C
Heat emission: 844 watts

Weight:

Equipment weight: 25 kg
Packed weight: 27 kg

Electrical:

Mains supply: 230 v / 50 hz
Power consumption: 345 watts
Supply: 2 m mains cable euro style plug

Refrigeration:

Compressor: 7.5 cc / 1/5 hp
Compressor duty at 0°C Evaporation: 408 watts
Cooling performance continuously: 499 watts / 429 kcal

Product coils:

Material: Stainless steel
Number of coils: 1
Length of coils: 8 m
Diameter (internal/external): 7 mm or 10 mm

Control type: Mechanical thermostat

Variations and Ordernumbers Linus 40

Overcounter

1 Tap BT 2000, 7 mm **49 1571 970**

1 Tap BT 2000, 7 mm, Aircompressor **49 1571 971**

1 Tap BT 2000, 7 mm, Ready for use **49 1571 972**

Undercounter

1 Line, 7 mm **49 1571 973**

Cooling performance and dispensing capacities at an ambient temperature of 24°C. 18°C beer ingoing temperature and dispense temperature not exceeding 8°C.

Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact Cornelius prior to placing your order.

