

# Lotus30


The Lotus30 from IMI Cornelius delivers exactly what it promises. A dry cooler with high cooling performance, a consistent design and reliable cooling technology. The new compact design provides versatility in a professional or private application for immediate use.

- Excellent workmanship
- Cost-effective cooling performance
- Small footprint
- Instantly ready for use
- Removable drip tray

## Key features

- Ergonomic design built in a high-quality stainless steel finish
- Fountain dispensing made easy - high performance combined with small space requirement
- Suitable for use at home too



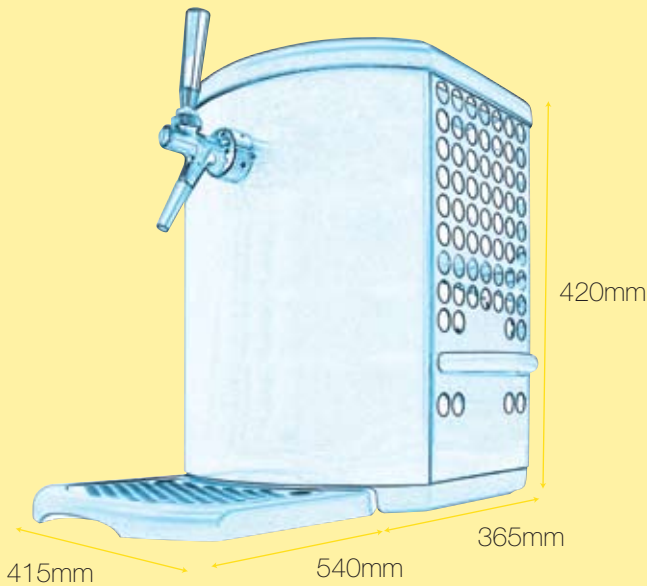

**Performance:**

Continuous product cooling per hour with a  $\Delta T$  of:

<b>10°C:</b>	<b>30 litres</b>
20°C:	15 litres
Maximum ambient temperature:	32°C
Heat emission:	550 watts

**Weight:**

Equipment weight:	22 kg
Packed weight:	24 kg

**Electrical:**

Mains supply:	230 v / 50 hz
Power consumption:	220 watts
Supply:	2 m mains cable euro style plug

**Refrigeration**

Compressor:	4.23 cc / 1/6 hp
Compressor duty at 0°C Evaporation:	262 watts
Cooling performance continuously:	350 watts / 300 kcal

**Product coils**

Material:	Stainless steel
Number of coils:	1
Length of coils:	8m
Diameter (internal/external):	7/7.5mm

**Control type:**

Mechanical thermostat

**Compliance To Standards And Legislation**

All coolers comply with Brewers Society Code of Practice for Electrical Safety in Beer Dispense in Licensed Premises. Designed to EN60335 part1 (Safety of Household and Similar Electrical Appliances-General Requirements). Product coils are made from 304 stainless steel. Product complies with the current EMC Directive.

IMI Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact IMI Cornelius prior to placing your order.

