


Vitalize805

Vitalize805 from IMI Cornelius (formerly known as Pearlmax3 ucc) is an under counter water cooler which is designed to supply organisations and venues with fresh drinking water. The unit is made to ensure the highest levels of hygiene are maintained, and is able to be connected to a CO2 supply if desired. The unit is connected to the mains water line which ensures the Vitalize805 is always ready to dispense a perfectly chilled and refreshing glass of water.

Key features include:

- Choice of chilled and carbonated water
- Very silent operation for use in noise sensitive environments
- To be used with dispense tower nearby the unit (recommendation: distance approx. 1m)



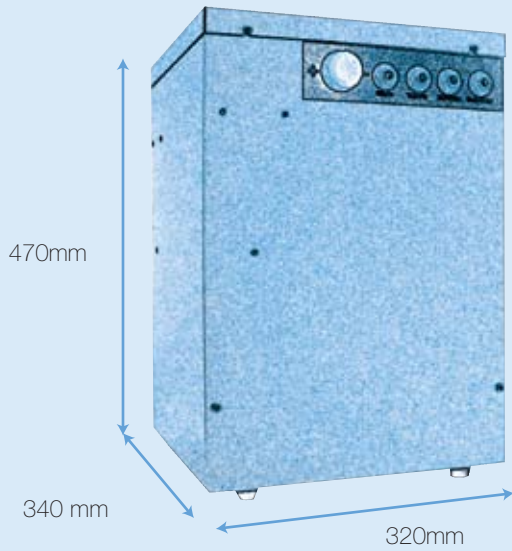

Performance:

Amount of product continuously dispensed per hour with a ΔT of:

6°C: 42 litres
10°C: 25 litres
20°C: 17 litres

Maximum ambient temperature: 32°C

Cooling performance:

(at 0°C evap. temp.) 291 watts (250 kcal)

Weight:

Equipment weight: 24 kg
Packed weight: 26 kg

Electrical:

Mains: 230 volts / 50Hz
Power consumption: 225 watts
Supply: 2m mains cable
euro style plug

Refrigeration:

Compressor: 4cc with direct chill technology

Product coils:

Material: Stainless Steel
Number: 1
Length of coils: 8 m
Diameter (internal/external): 7mm ID 8mm O.D.

Control type:

Mechanical thermostat

IMI Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact IMI Cornelius prior to placing your order.

